



ADASLink Full Diagnostic Scan Tool Quick Start Guide

Table Of Contents

1	Safety Precautions	3
2	General Information	4
3	Setup	5
3.1	Battery Charging	5
3.2	Battery Life Tips	5
3.3	Docking Station	5
3.4	Power	6
3.5	Power Button Functions	6
3.6	Register	6
3.7	Connect VCI to Vehicle	7
3.8	Connect Tablet to VCI (Pairing)	7
3.9	Connect the Tablet to the Aligner	9
4	Main Menu	10
5	Selecting Vehicle	11
5.1	AutoID®	11
6	Diagnostic Functions	12
7	Features	13
7.1	OBDII/DLC Cable	13
8	Software Updates	13
8.1	AutoDetect®	13
9	Powering Off ADS 10X Plus	14

1 Safety Precautions

BEFORE OPERATING THIS TOOL, ALL OPERATORS SHOULD READ AND UNDERSTAND THIS QUICK START GUIDE AND FOLLOW ALL SAFETY WARNINGS AND INSTRUCTIONS.

KEEP THESE INSTRUCTIONS WITH THE TOOL FOR FUTURE REFERENCE. IF YOU HAVE ANY QUESTIONS, CONTACT YOUR BOSCH REPRESENTATIVE OR DISTRIBUTOR.

DANGER

When an engine is operating, keep the service area well ventilated or attach a building exhaust removal system to the engine exhaust system. Engines produce carbon monoxide, an odorless, poisonous gas that causes slower reaction time and can lead to death or serious personal injury.


WARNING:

- When working with hydraulic or fuel lines, be careful that liquids under pressure do not escape and create a dangerous condition. Use adequate ventilation and make sure there are no sparks or possibility of sparks that may ignite any vapor.
- Wear an American National Standards Institute (ANSI) Z87.1 approved eye shield when testing or repairing vehicles.
- Objects propelled by whirling engine components or pressurized liquids escaping may cause personal injury.
- Set the parking brake and block the wheels before testing or repairing a vehicle. It is especially important to block the wheels on front-wheel drive vehicles because the parking brake does not hold the drive wheels.
- Do not drive the vehicle and operate the software at the same time.
- Maintain adequate clearance around moving components or belts during testing.
- Moving components and belts can catch loose clothing, body parts, or test equipment and cause serious personal injury or tool damage.
- Automotive batteries contain sulfuric acid and produce explosive gases that can result in serious injury due to ignition of gases. Keep lit cigarettes, sparks, flames, and other ignition sources away from the battery at all times.
- Refer to the service manual for the vehicle being serviced. Adhere to all diagnostic procedures and precautions. Failure to do so could result in personal injury or otherwise unneeded repairs.
- Use only specially designed replacement parts (brake hoses and lines) for ABS equipped vehicles.
- After bleeding the brake system, check the brake pedal for excessive travel or a "spongy" feel. Bleed again if either condition is present.
- When installing transmitting devices (Citizen Band radio, telephone, etc) on ABS-equipped vehicles, do not locate the antenna near the ABS control unit or any other control unit.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and radiates radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
- To reduce risk of injury, charge only Bosch Automotive Service Solutions, Inc. supplied charging block and power cord.
- Use of an attachment not recommended or sold by the battery charger manufacturer may result in fire, electric shock, or personal injury.
- Do not operate the tool with a damaged cord or connector. Replace damaged cords and connectors immediately.
- Do not operate the charger if it has received a sharp blow, been dropped, or otherwise damaged in any way. Take the charger to a qualified service person.
- Do not disassemble the charger. Take the charger to a qualified service person if service or repair is necessary. Incorrect reassembly may result in electric shock or fire. Unplug charger before attempting any maintenance or cleaning. Turning off controls will not reduce this risk.
- To prevent possible hearing damage, avoid using the tool at high volume levels for long periods.
- Do not expose tool or charger to rain, moisture, or snow.
- Verify that cords are located where they will not be stepped on, tripped over, or otherwise become a safety hazard or subjected to damage or stress.
- Use only batteries that are approved for use with this tool. Use of other types may increase the risk of fire or explosion.
- Do not carry a battery in your pocket, purse, or other container where metal objects (such as car keys or paper clips) could short-circuit the battery terminals. The resulting excessive current flow can cause extremely high temperatures and may result in damage to the battery pack or cause fire or burns.
- The battery poses a burn hazard if you handle it improperly. Do not disassemble it. Handle a damaged or leaking battery with extreme care. If the battery is damaged, electrolyte may leak from the cells and may cause personal injury.
- Keep the battery away from children.
- Do not store or leave your tool or battery near a heat source such as a radiator, fireplace, stove, electric heater, or other heat-generating appliance or otherwise expose it to temperatures in excess of 60°C (140°F). When heated to excessive temperatures, battery cells could explode or vent, causing personal injury or risk of fire.
- Do not dispose of your tool's battery in a fire or with normal household waste. Battery cells may explode. Discard a used battery according to the manufacturer's instructions or contact your local waste disposal agency for disposal instructions. Dispose of a spent or damaged battery promptly.

CAUTION:

- To avoid damage or generation of false data, make sure the vehicle battery is fully charged and the connection to the vehicle Data Link Connector (DLC) is clean and secure.
- Do not place the tool on the distributor of a vehicle. Strong electromagnetic interference can damage the tool.
- Never disconnect or reconnect any electrical connector while the ignition is on. Powertrain Control Module (PCM) damage may result.

2 General Information

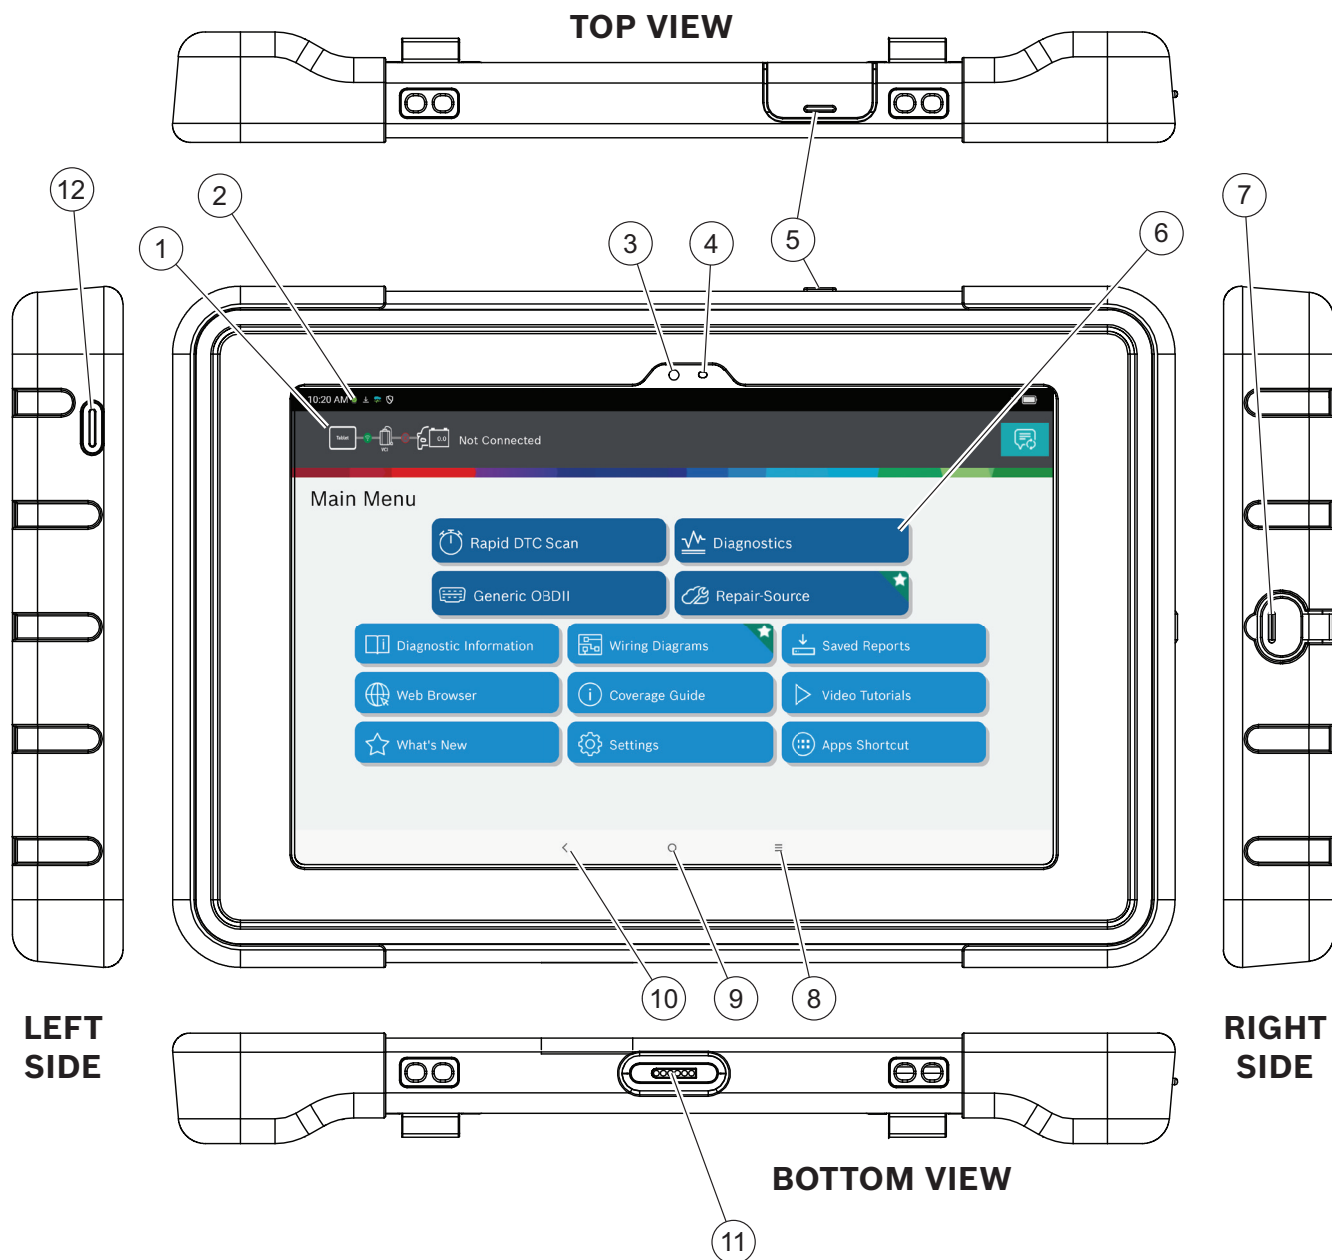

- | | | |
|---------------------------------|-----------------------------|-------------------------------|
| 1. Vehicle connection indicator | 5. SD card access door | 10. Back button |
| 2. VCI connection manager | 6. Main Menu functions | 11. Docking station connector |
| 3. Front facing camera | 7. USB C charging/data port | 12. Power button |
| 4. Ambient light sensor | 8. Navigation button | |
| | 9. Home button | |


3 Setup

3.1 Battery Charging

Connect the tablet to AC power using the USB power block and USB C charging cord and fully charge the battery.

When the tablet is turned on, the level of battery charge is indicated in the upper right corner of the screen.

Note: ADS 10X Plus is supplied with 1 USB C power cables and 1 USB power block.

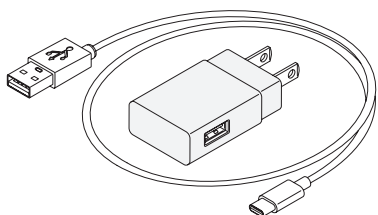

2 ft. cable

3.2 Battery Life Tips

The tablet is an Android based touch-screen tablet. The battery life icon shows charge level. The scan tool lets you know how much battery life is left by viewing the icon located at the top right of the home screen. Like all Android devices, there are tips to help extend or maximize battery life.

When not actively being used, the screen will timeout and the scan tool display will power off, while application remains running in background. The user can set the length of delay between the last screen touch and automatic screen timeout (dim and lock). From the Home screen, touch the Android App button - Settings - Display.

Select Screen timeout, then select the length of time from the last screen touch and automatic screen timeout.

To use again, press the power button to wake the tool up. This will allow

maximum run time, while not limiting productivity.

When the tool is powered up, even if it is not being actively used, Wi-Fi and Bluetooth® radios as well as all other necessary hardware are still being powered. Battery life is comparable to similar devices when in this state.


3.3 Docking Station

The tablet and VCI should be stored in the docking station when not in use. The docking station powers the VCI and provides a slow, steady charge to the tablet to preserve battery integrity.

Seat the tablet and VCI in the docking station so that the docking station connector at the bottom of each device connects to the docking station.


The docking station includes one USB port to charge accessories and other devices.

Charging and power indicating lights are on the front right of the docking station. The light on the left indicates power to the tablet. The light is red when charging and green when fully charged. The light on the right indicates VCI is powered on by the docking station.

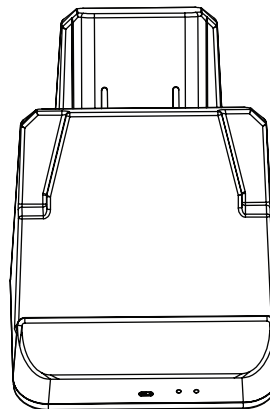

3.4 Power

1. Press the power button to turn on the tablet.

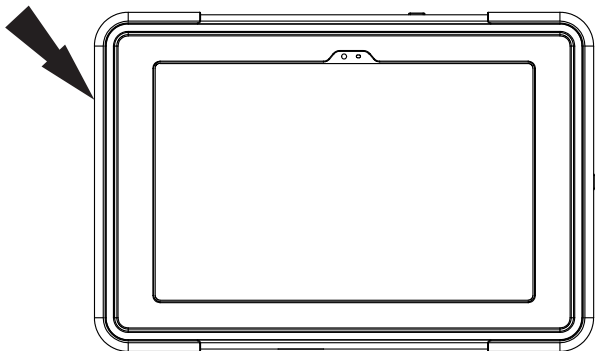


3.5 Power Button Functions


- a. ON: Press and hold the power button for about 5 seconds to turn the tablet on.
- b. OFF: Press and hold the power button for 3 seconds. A pop up window will appear to shut down the tablet. ON: If the screen times out or is in standby mode, press and release the power button to wake up the tablet.
- c. OFF: Press the power button and hold for 5 seconds to turn the tablet off completely (not recommended).

3.6 Register


1. Select a language.

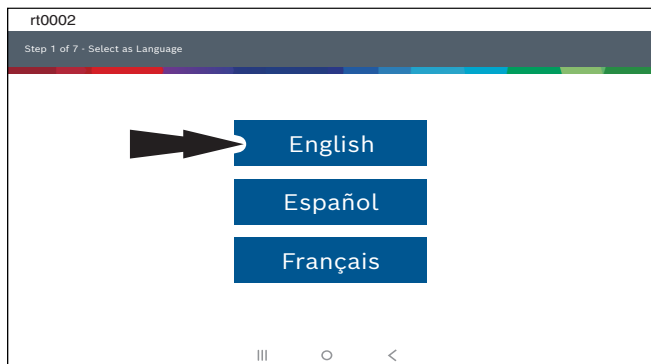


2. Select Register Now. (*Register the tool, begin a trial period, or run the tool in demo mode.*)

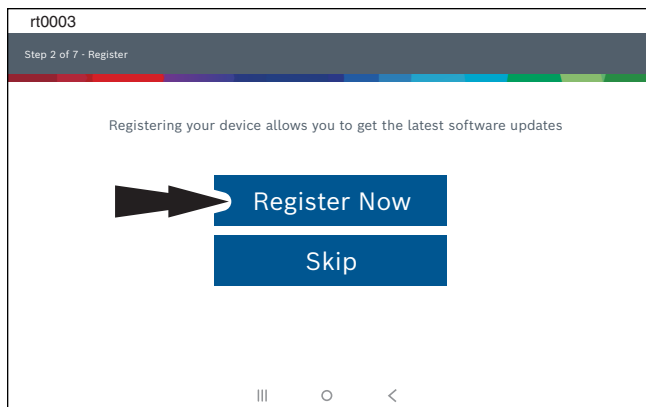


3. Read and accept the End User License Agreement.

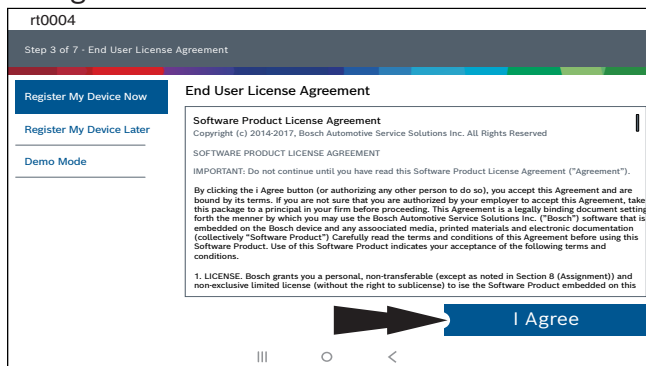

4. Select the correct Time Zone.

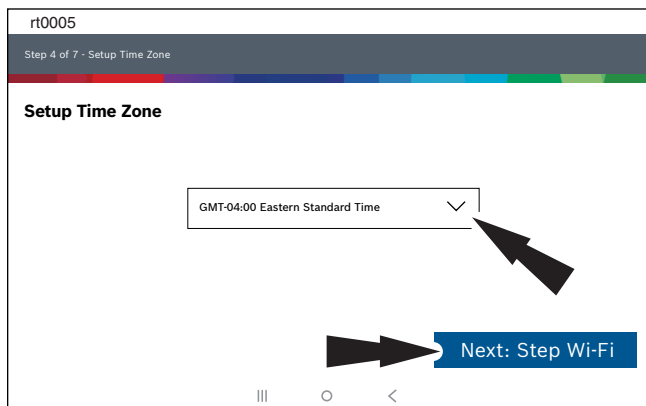

5. Enable Wi-Fi and select a network and select Next.

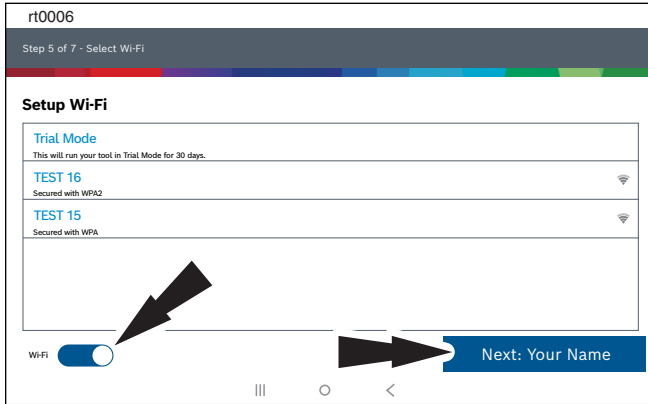


Note:


Wi-Fi Must be ON. If Wi-Fi is OFF slide the Wi-Fi switch to the ON position and follow the prompts on the screen.

If a Network password is required the Android Wi-Fi screen will be displayed. Follow the prompts on the screen.


6. Activate subscription and warranty.

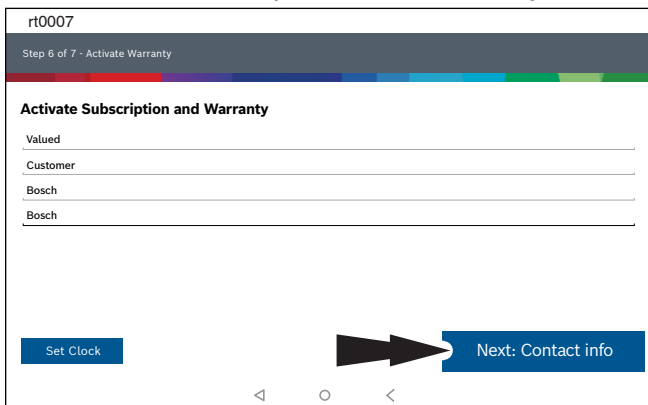

7. Enter your Name. Follow the prompts on the screen to activate warranty.

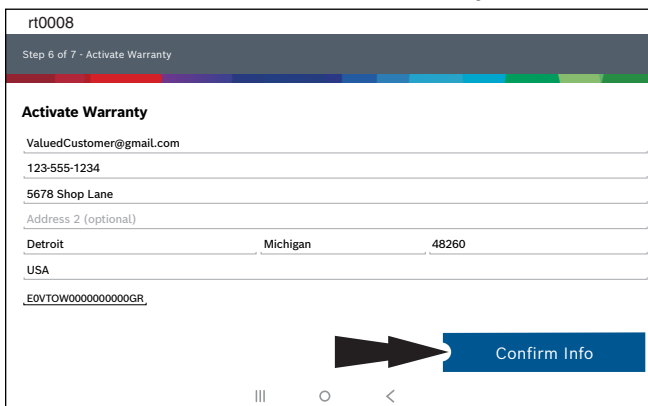


8. Enter contact information. Follow the prompts on the screen.

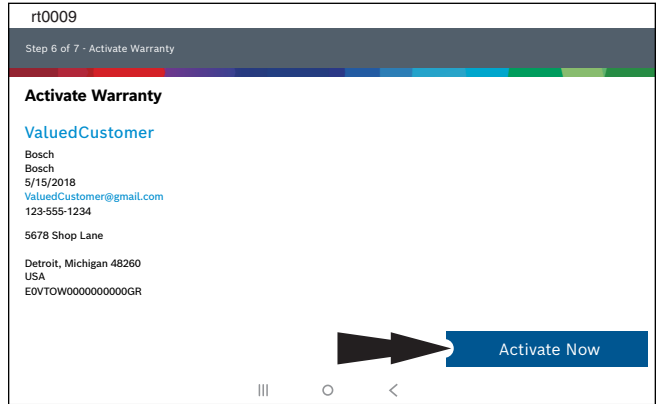

9. Confirm information. Follow the prompts on the screen and activate warranty.

3.7 Connect the VCI to the vehicle

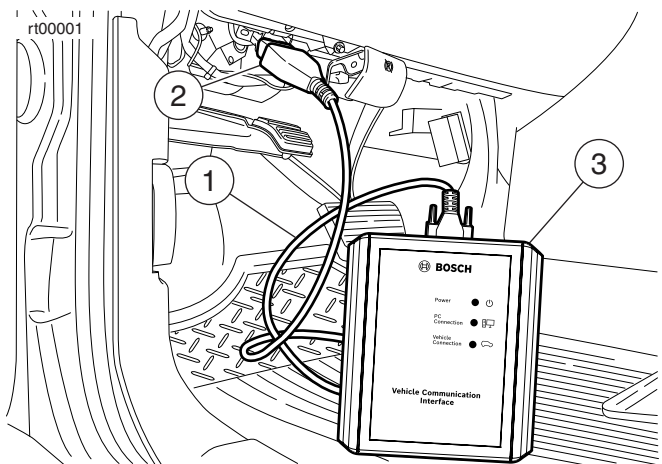


1. OBDII/DLC Cable
2. DLC
3. VCI

3.8 Connect the tablet to the VCI (Pairing)

VCI Connection Manager Icon Definitions	
	Icon that will display when user is connected to DVCI.
	Icon will display when user is connected to DVCI but signal is degraded.
	Icon will display when user is NOT connected to DVCI.
	Icon will display when user is connected to DVCI, but the version does not match expected tablet version.

- a. Connect the VCI to the vehicle DLC.
- b. At this point VCI Connection Manager icon should display “Connected via Wi-Fi”.
- c. If VCI Connection Manager icon shows “No connection,” swipe down from the top left corner and select the VCI Connection Manager tile. Alternatively, select “VCI Connection Manager” from the Apps Shortcut Tile.



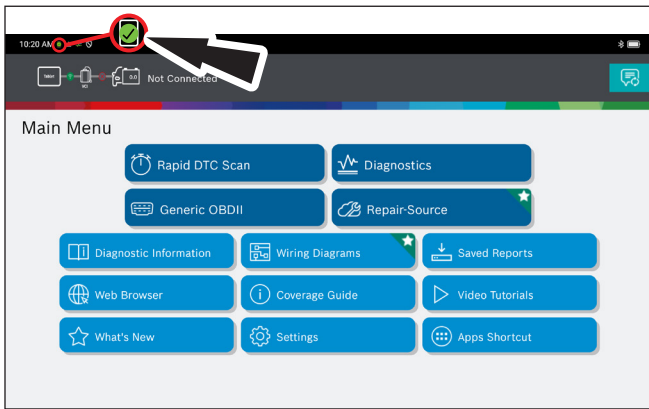


- d. Once VCI Connection Manager icon is selected, VCI Connection Manager dialog is displayed, listing discovered VCIs.
- e. Select “Connect” next to VCI in the list to pair with it.

Once VCI Connection Manager icon changes to “Connected via Wi-Fi”, the tool is ready to use.

The tablet is now paired to a VCI. To use a different VCI in the future, repeat the steps for manually pairing the VCI.


Select “Connect” next to desired VCI. VCI Connection Manager dialog will refresh to show successful connection.

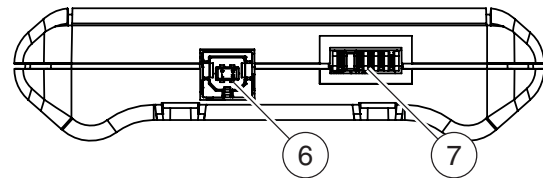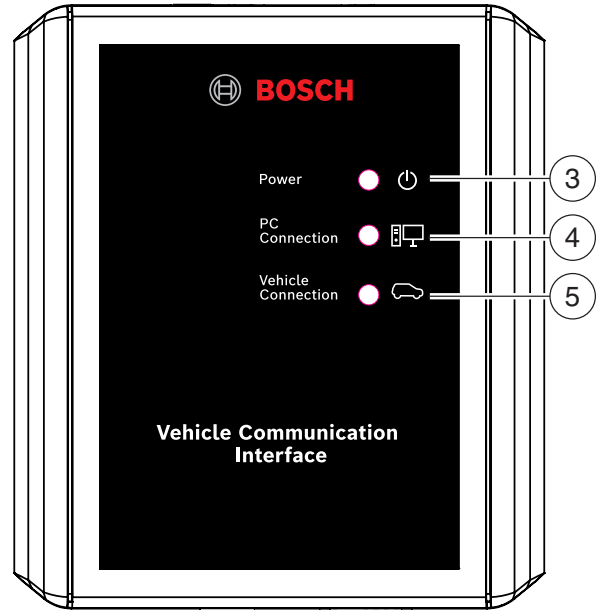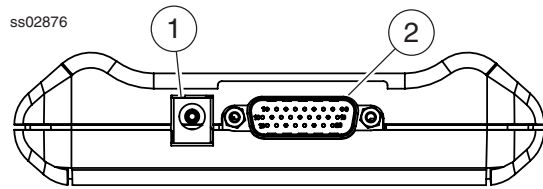


- 1. **Power port**
- 2. **DLC/OBDII cable port**
- 3. **Power**
Indicates the VCI has received power.
- 4. **PC Connection**
Indicates the VCI is communicating with the PC/Tablet.
- 5. **Vehicle Connection**
Solid LED indicates the VCI is connected with vehicle. Blinking LED indicates the VCI is communicating with vehicle.
- 6. **USB “B” Port**
- 7. **Docking station connector**

3.9 Connect the tablet to the aligner.


- From the Main Menu, select 2nd row of K-Keys.
- Select Service Programs.
- Select Set Up Aligner.
- Under Alignment Procedure, select Vehicle Specific Alignment Preferences, then select Set Up Selected Item.

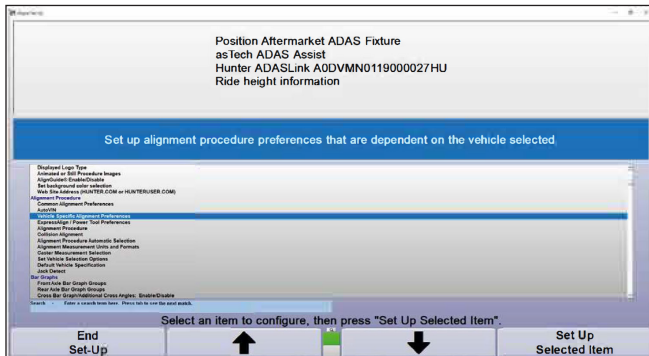


- When the aligner is set up, select End Setup.

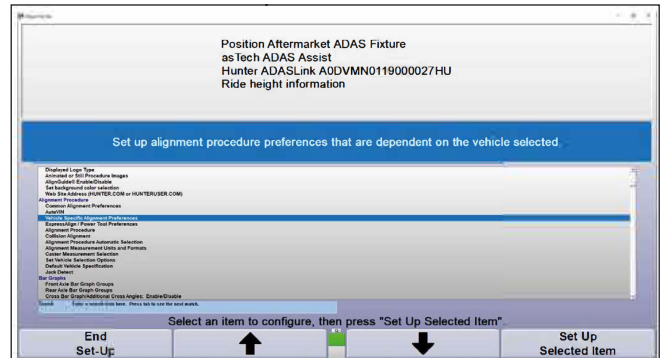

- Select Hunter ADASLink, then OK.

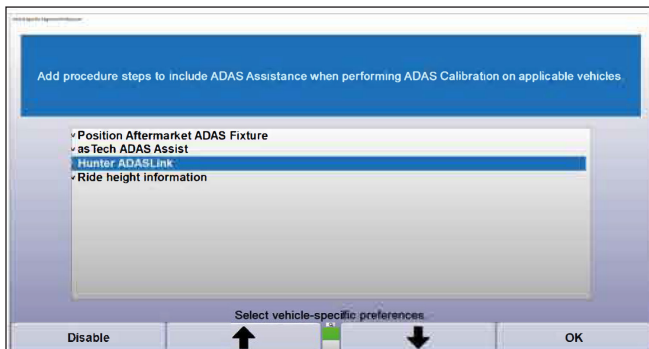

- Enter serial number and select OK.

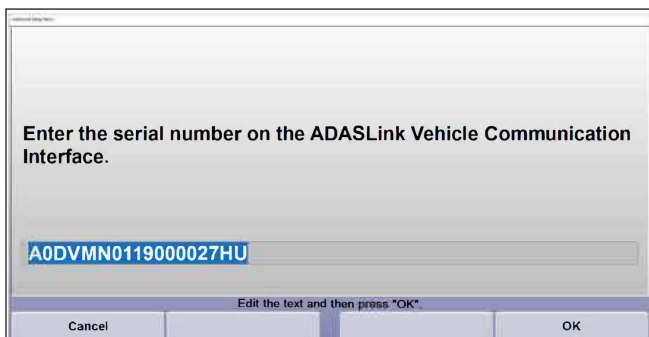

4 Main Menu



1. Diagnostics button

Enter vehicle diagnostics session.

2. Requested Procedures List button

Shortcut to list of WinAlign requested procedures.

3. Rapid DTC Scan button

Shortcut to run an all-system scan.

4. Generic OBDII button

Access Global OBDII emission related ECU information.

5. TruSpeed Repair button

Direct link to access Repair Source vehicle repair information.

6. Diagnostic Information button

Provides diagnostic, repair, and reset information for the selected vehicle.

7. Wiring Diagrams button

Provides OEM and vehicle specific full color, full system wiring diagrams.

8. Saved Reports button

Access saved vehicle scan reports and data stream recordings.

9. Web Browser button

Full internet access and shortcuts to repair information and OEM websites.

10. Coverage Guide button

Access vehicle coverage button.

11. Video Tutorials button

Access video tutorial files on scan tool use.

12. What's New button

Preview scan tool features and operations.

13. Settings button


Access tool settings, printer setup, subscription information, software updates and more.

14. Apps Shortcut button

Access other available Android applications.

5 Selecting Vehicle


Allows the user to enter a new vehicle or view Recent Vehicles previously selected. Select the “Select Vehicle” button then enter a vehicle one of four ways:

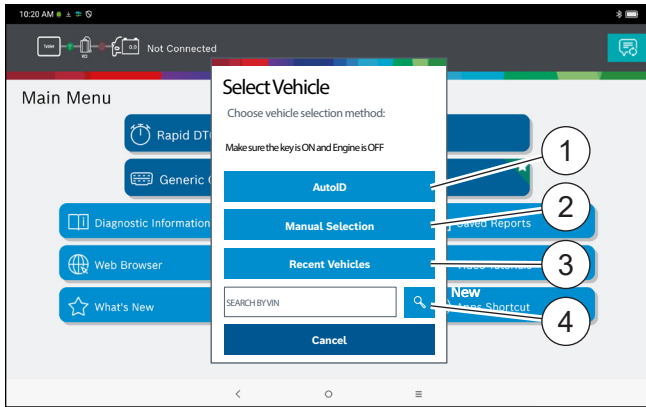

1. **Select AutoID to start to automatically detect the vehicle.**
2. **Select Manual Selection to manually enter information.**
 - Year
 - Make
 - Model
 - Engine
3. **Select Recent Vehicles to select from a list of previously selected vehicles.**
4. **Enter VIN in Search by VIN field.**


5.1 AutoID®

- Automatically selects the vehicle using OBD II Mode 9.
- Identifies vehicles to quickly set up year, make, model, and engine.
- Coverage: AutoID can be a very fast and accurate way to select a vehicle. AutoID retrieves the VIN number from the vehicle’s on-board computer for OEM’s that support the function. The function used is Mode 9 Vehicle Information which is one of the 10 modes of the OBD II regulation. As illustrated below, Mode 9’s support of AutoID varies by OEM and model year. Very few OEM’s support Mode 9 VIN from 1996 – 2000. Use the information below to understand when Auto ID is best used. 2000-2004 - some US vehicles may respond to Mode 9 From 2000-2004 it was only used at the OEMs discretion.
 - 2005-2007 - many US vehicles will respond to Mode 9 From 2000-2007 it was CARB advised, but not required.
 - 2008-current - virtually all US vehicles are required to respond to Mode 9 OBDII Mode 9 was not ARB required until 2008MY.

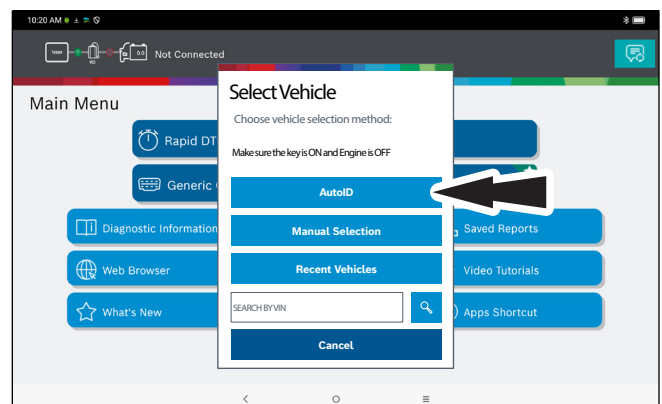

6 Diagnostic Functions

After selecting a vehicle the user will be able to begin using diagnostic functions on the vehicle.

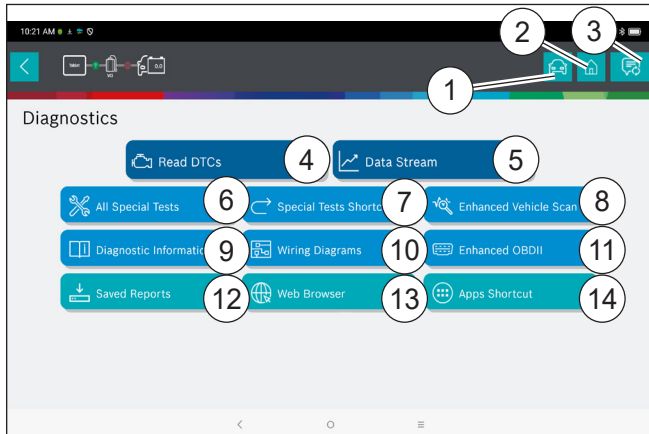

1. Change Vehicle button

Shortcut to the select vehicle screen

2. Home Button

Shortcut to the Main Menu

3. User Feedback

Shortcut to User Feedback

4. Read DTCs

Access menu to select DTC read options (all or specific controllers).

5. Data Stream

The data stream function shows live sensor and solenoid data streaming from the vehicle ECU (electronic control unit).

6. All Special Tests

A full list of available actuations and adaptation functions.

7. Special Tests Shortcut

Access to vehicle maintenance tests for specific vehicle systems to provide for recalibration or reset after service.

8. Enhanced Vehicle Scan

Access to scan all available controllers on the selected vehicle for Modes 1-7.

9. Diagnostic Information

Provides diagnostic, repair, and reset information for the selected vehicle.

10. Wiring Diagrams

Provides wiring diagrams for the selected vehicle.

11. Enhanced OBDII

Access manufacturer specific OBDII parameters and information.

12. Saved Reports

Access saved vehicle scan reports and data stream recordings.

13. Web Browser

Locate saved vehicle scan reports and data stream recordings.

14. Apps Shortcut


Access other available Android applications.

7 Features

7.1 OBDII/DLC Cable

The OBDII/DLC cable has a LED lamp to locate vehicle DLC and voltmeter that displays battery voltage.

- The LED in the OBDII cable end is activated by a button on the top of the connector. This feature is provided to assist users in finding the vehicle DLC..
- The vehicle battery indicator is activated when the OBDII cable is plugged into the vehicle and displays the Pin 16 voltage available on the vehicle DLC. A voltage reading below 11.8 Volts will activate an indication of “LO” or if above 15.5 Volts and indication of “HI” will activate highlighting that the battery or charging system needs attention.

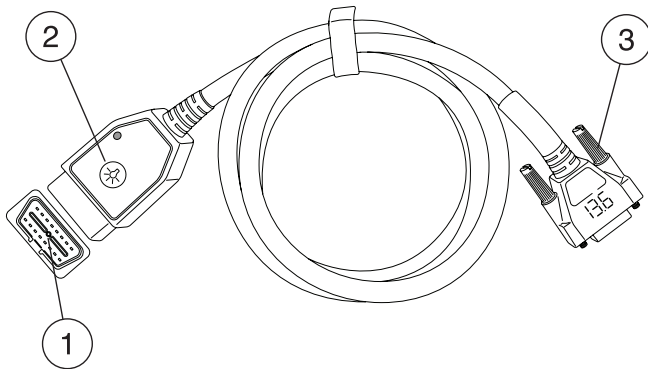

1. LED Lamp
2. LED lamp switch
3. DLC tool connector with voltmeter



8 Software Updates

Software Updates: Periodically, updates will become available and the user will be notified through a message on the screen. To receive updates automatically, connect to Wi-Fi and leave scan tool on overnight.

Note: Scan Tool will download updates automatically when connected to the internet. When download is complete, the user will be informed with a pop up screen. To install an update, the scan tool must be connected to the AC power adapter, over 50% battery life and not connected to a vehicles DLC.

8.1 AutoDetect®

The new user interface utilizes graphic “badges” to illustrate when critical information is found. AutoDetect® automatically detects vehicle-specific solutions and graphically alerts the user of on-tool or web-based repair information found. To use the Code To Fix® feature, press the Diagnostic Trouble Code to launch the DTC Info screen for access to exclusive experienced-based fixes and repair information for that specific vehicle and DTC.

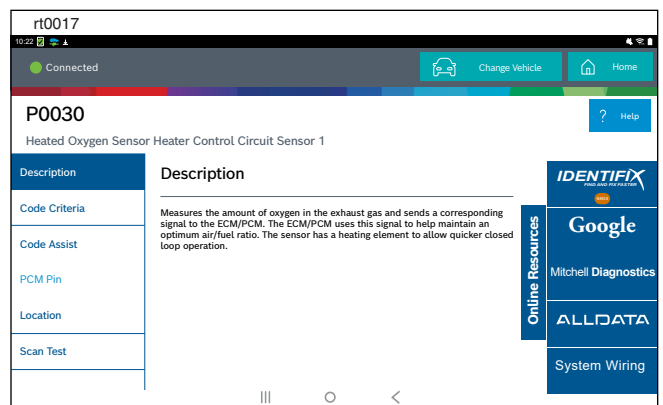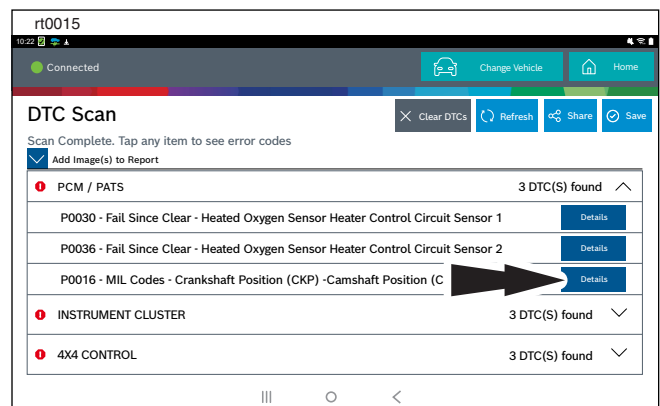


9 Powering Off ADS 10X Plus

1. Press and hold the power button for 3 to 8 seconds (depending on which settings are enabled) till power/restart screen appears.



2. Select Power Off. The tool will now shutdown.

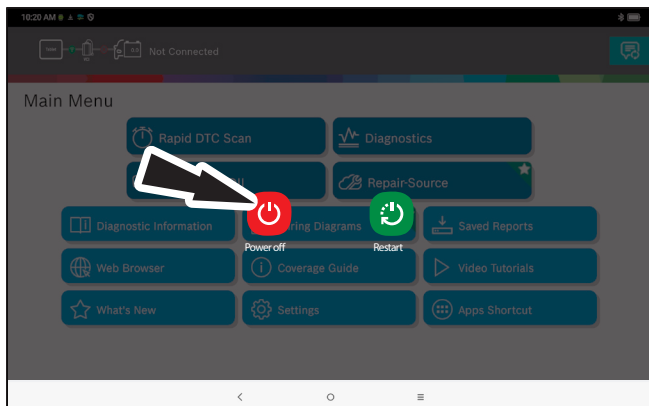

Note: When switching vehicles, it is best to return to the home screen before disconnecting the VCI from the vehicle to avoid communication errors..

Bosch Technical Support: (855) 267-2483
Fax: 1-800-955-8329
techsupport.diagnostics@us.bosch.com

Please record and retain this important information:

Part No: _____

Serial No: _____

Purchase Date: _____

**Bosch**

Automotive Service Solutions Inc

655 Eisenhower Drive
Owatonna, MN 55060 USA
Telephone: 507-455-7000
Customer Service: 800-321-4889
Fax: 800-283-8665
dgwscs@us.bosch.com
Technical Support: 855-267-2483
Fax: 800-955-8329
techsupport.diagnostics@us.bosch.com

www.boschdiagnostics.com

